


- 5 Valve Manifold - Pipe to Flange Mount Type
- Designed to connect Impulse Lines and Transmitters.
- Designed for Blocking, Bleeding and Calibrating Pressure Transmitters.
- Two Block, Two Equalizer and One bleed Valve with Two Vent Connections.
- Standard Working Pressure 6,000 PSI with PTFE packing.
- SS 316/316 L Bar stock construction
- Grafoil offered for hight temperatures.
- Standard NPT End Connections.
- Heat Code Traceability.
- NACE MR-01-75 Complaint materials available on request.
- 3.1 Certificates furnshied.
- Mounting Brackets along with Accessories availbale on request.
- PMI certificates available on request.

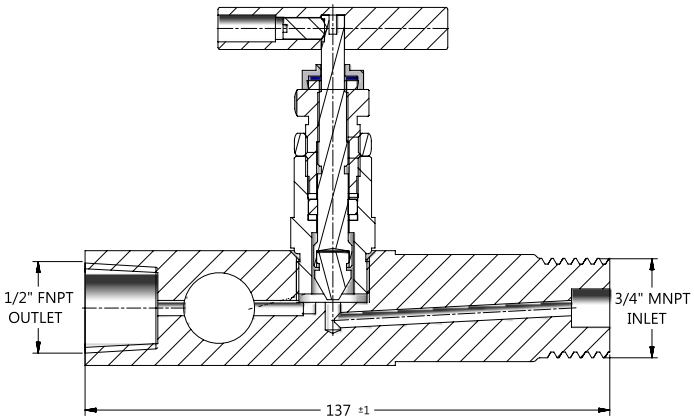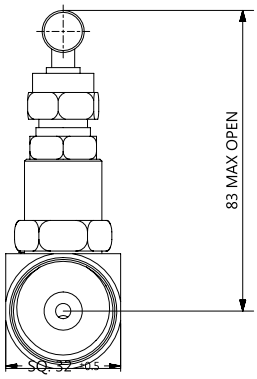

**Body : Extended Body Type**
**Inlet : 1/2” MNPT**
**Outlet : 1/2” FNPT**

* For any other material / size combinations, please contact the sales department.
* All specifications are subject to change without notice
* All sales subject to standard terms and conditions.

© 2022 MAGWELL All rights reserved. The technical details & specifications are provided as such at the time of printing. Technical changes and omissions may happen later.

Gauge Valves

**Magwell LLC**
537 Cajundome Boulevard, Suite 111
Lafayette LA 70506, USA
info@magwellus.com
(888) 624-9355