


- Designed to mount directly to the instrument for isolation purposes during calibration or shutdown procedures.
- SS 316/316L Bar stock construction
- Standard Working Pressure 6,000 PSI with PTFE packing.
- Optional 10,000 PSI available on request
- Grafoil ofered for higher temperatures.
- Standard NPT End Connections.
- Heat Code Traceability.
- NACE MR-01-75 Compliant materials available on request.
- 3.1 Certificates furnished.
- Vent Plugs or Bleed Valves provided on request.
- PMI certificates available on request.

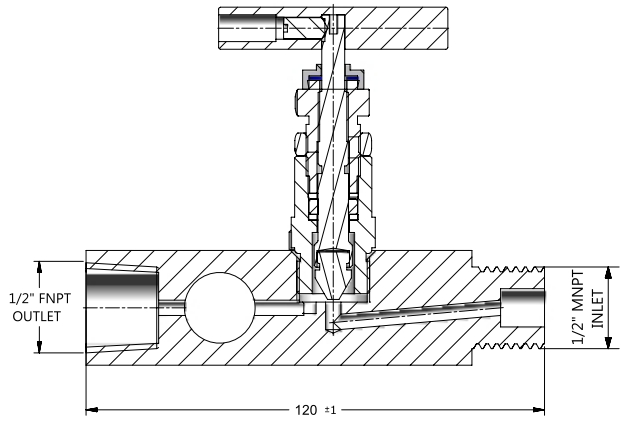

A-A

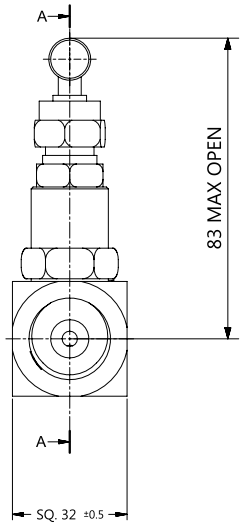



Inlet : 1/2” MNPT
Outlet : 1/2” FNPT

* For any other material / size combinations, please contact the sales department.
* All specifications are subject to change without notice
* All sales subject to standard terms and conditions.

Magwell LLC
537 Cajundome Boulevard, Suite 111
Lafayette LA 70506, USA
info@magwellus.com
(888) 624-9355

Gauge Valves